

TECHNICAL DETAILS



westex.
ORIGINS

ORIGINS ENGINEERED WOOD COLLECTION



ORIGINS ENGINEERED WOOD COLLECTION



Bring the beauty and character of real wood inside with our Origins Engineered Wood Collection.

End Use Classification:

Class 23 Heavy Domestic Use

Total Thickness: **14mm**

Real Wood Layer: **3mm**

Texture: **Slightly Brushed**

Installation: **Tongue & Groove**

Structure: **3-layer**


Standard Colours: **3 Designs available in 5 Colours**

3 DESIGN OPTIONS



FISHTAIL

Plank Size: 510 x 90 x 14/3 mm

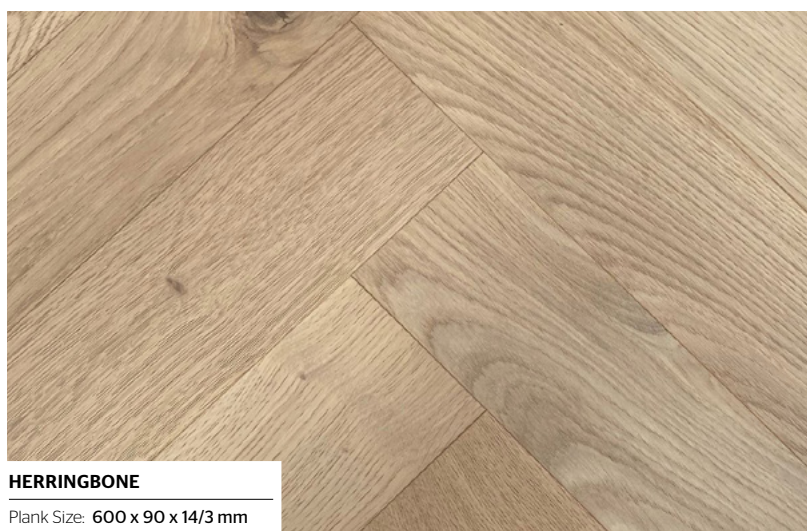

HERRINGBONE

Plank Size: 600 x 90 x 14/3 mm



PLANK

Plank Size: 190 x 1900 x 14/3 mm



Westex Carpets Limited.

Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom

Tel: +44 (0)1274 861334

Fax: +44 (0)1274 873266

westexflooring.com

info@westexflooring.com

westex.


FLOORING EXCELLENCE

ORIGINS ENGINEERED WOOD COLLECTION


5 COLOURS




Natural



Invisible



Light Smoked



Dark Smoked



Latte



ORIGINS FISHTAIL

Product Specification

3-layer oak wood flooring	EN 14342 (Free Class)	DOP PQ2021-5
Dimensions	Plank	510 x 90 x 14/3 mm
	Box	16 planks / 0.734 m²
	Nested lengths	-
Density	EN ISO 23996	700 ±50 kg/m³
Installation	ISO 24334	T&G (glued)
Top Layer		3mm European oak (Quercus Robur)
Grading		Rustic B
Surface		Slightly brushed
Bevel		Bevel 4V
Gloss level	60°	5-7%
Finishing		Matt lacquer
Warranty conditions	Residential Use Commercial Use	20 years upon request
Application	EN 14342 (Free Class)	Class 23 General Domestic Use
CE Mark	EN 14041	





Product Properties

	Test Method	Min. Req.	Result
Indoor air certifications			A, REACH
Fire resistance	EN 13501-1		Dfl-s1
Slip Resistance	EN 13893		DS (≥0.30)
Formaldehyde emission	EN 717-1	≤0.124 mg/m³	E1
Pentachlorofenol content	EN 12673	< 5 ppm	< detectable limit
Underfloor heating	EN 12667	R < 0.15 m²K/W	0.0812-0.1633 m² K/W OK (max +28°C) + glued
Biological durability			Class 1








ORIGINS HERRINGBONE

Product Specification



3-layer oak wood flooring	EN 14342 (Free Class)	DOP PQ2021-5	
Dimensions	Plank	600 x 90 x 14/3 mm	
	Box	16 planks / 0.86 m ²	
	Nested lengths	-	
Density	EN ISO 23996	700 ±50 kg/m ³	
Installation	ISO 24334	T&G (glued)	
Top Layer		3mm European oak (Quercus Robur)	
Grading		Rustic B	
Surface		Slightly brushed	
Bevel		Bevel 4V	
Gloss level	60°	5-7%	
Finishing		Matt lacquer	
Warranty conditions	Residential Use Commercial Use	20 years upon request	
Application	EN 14342 (Free Class)	Class 23 General Domestic Use	
CE Mark	EN 14041		

Product Properties






	Test Method	Min. Req.	Result	
Indoor air certifications			A, REACH	
Fire resistance	EN 13501-1		Dfl-s1	
Slip Resistance	EN 13893		DS (≥0.30)	
Formaldehyde emission	EN 717-1	≤0.124 mg/m ³	E1	
Pentachlorofenol content	EN 12673	< 5 ppm	< detectable limit	
Underfloor heating	EN 12667	R < 0.15 m ² K/W	0.0812-0.1633 m ² K/W OK (max +28°C) + glued	
Biological durability			Class 1	

ORIGINS PLANK

Product Specification

3-layer oak wood flooring	EN 14342 (Free Class)	DOP PQ2021-5	
Dimensions	Plank	190 x 1900 x 14/3 mm	
	Box	6 planks (4 full + 2 nested) / 2.17 m²	
	Nested lengths	1 plank (190 x 400 x 14/3mm)	
Density	EN ISO 23996	700 ±50 kg/m³	
Installation	ISO 24334	T&G (glued)	
Top Layer		3mm European oak (Quercus Robur)	
Grading		Rustic B	
Surface		Slightly brushed	
Bevel		Bevel 4V	
Gloss level	60°	5-7%	
Finishing		Matt lacquer	
Warranty conditions	Residential Use Commercial Use	20 years upon request	
Application	EN 14342 (Free Class)	Class 23 General Domestic Use	
CE Mark	EN 14041		

Product Properties

	Test Method	Min. Req.	Result	
Indoor air certifications			A, REACH	
Fire resistance	EN 13501-1		Dfl-s1	
Slip Resistance	EN 13893		DS (≥0.30)	
Formaldehyde emission	EN 717-1	≤0.124 mg/m³	E1	
Pentachlorofenol content	EN 12673	< 5 ppm	< detectable limit	
Underfloor heating	EN 12667	R < 0.15 m²K/W	0.0812-0.1633 m² K/W OK (max +28°C) + glued	
Biological durability			Class 1	



*A minimum order quantity of 40m² in any one width applies.



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE