

TECHNICAL DETAILS

westex.

FLOORING EXCELLENCE

LUXURY VINYL TILE
STONework TILES

LVT STONWORK TILES



A high quality LVT offers long lasting durability creating the look of an authentic Stonework Tile with or without grouting

Class 23 Heavy Domestic Use
Class 33 Heavy Commercial Use
Class 42 General Industrial Use

Thickness*
3.00mm

Wear Layer*
0.70mm


Bevel:
Yes - 4 Sides

Slip Resistance:
R10

Standard Colours:
6 Stonework Tile + 5 Feature Strip Colours

*+/- 10% commercial tolerance

OPTIONAL GROUTING STRIP

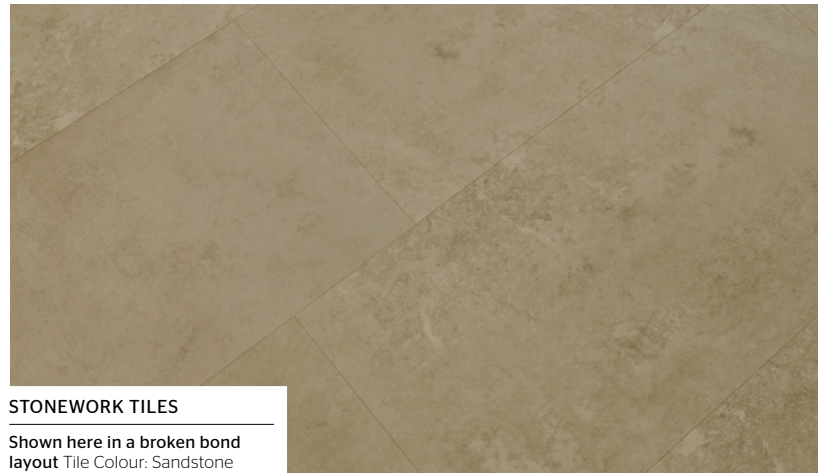

STONEWORK TILES





Shown here in a broken bond layout
 Tile Colour: Sandstone



WITH FEATURE STRIPS

To give the appearance of grouting
 Strip Colour: Anthracite

LAYOUT OPTIONS

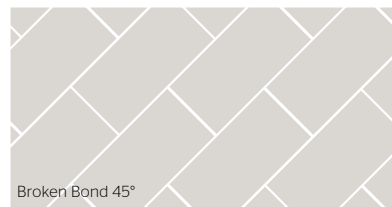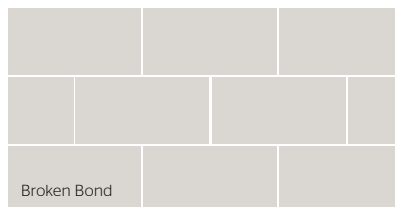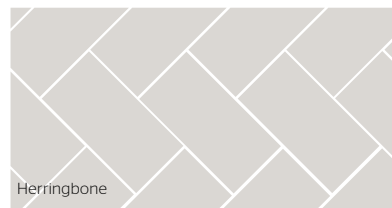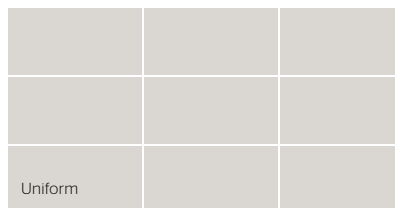

Feature Strip Dimensions: 3mm wide x 1m length

Individual Tile Dimensions:
610 x 305mm (24" x 12")



Westex Carpets Limited.
 Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
 Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
 westexflooring.com info@westexflooring.com



LVT STONWORK TILES

6 STONWORK TILE COLOURS



Basalt



Limestone




Sandstone



Shale



Marble

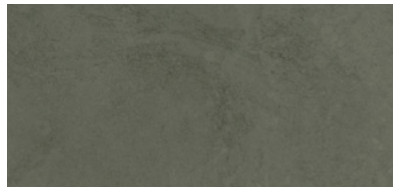

Slate

FEATURE STRIPS



Anthracite



Light Grey



Brazilian



Beige













Cream



LVT STONETWORK TILES

Technical Specification

End Use Classification	ISO 10582:2010 ISO 10874:2009	Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use Class 42 General Industrial Use	
Size		610 x 305mm (24" x 12")	
Pieces per Box		16	
m ² per Box		2.97m ²	
Thickness*	ISO 24346:2006	3mm	
Wear layer*		0.70mm	
Bevel		Yes - 4 sides	
Fire Classification	EN 13501-1:2017 +A1:2009	Bfl-s1	
	EN ISO 11925-2:2010	Part 2 No Ignition	
	EN ISO 9239-1:2010	Part 1 Charring Observed Extinguished Naturally	
Slip Resistance	DIN 51130:2004 (Ramp Test)	R10	
Wear Group	EN 649	T	
Residual Indentation*	ISO 24343-1:2007	0.05mm	
Thermal Conductivity	EN 12667:2001	0.076W/(m-K)	
Thermal Resistance	EN 12667:2001	0.036 m²K/W	
Suitability for castor chairs	EN 425:2002	Pass	
Dimensional Stability	EN ISO 23999:2012	MD 0.06% AMD 0.07% Curling ≤2.0mm	
Light Fastness	ISO 105-B02:2014	Grade 6	
Determination of Impact Sound	ASTM E 492-09(2016) ^{s1}	IIC=63	
Sound Reduction	ISO 717-2:2013	ΔL_w=10dB	
Underfloor heating system		Suitable to a max. 27°C Please check with manufacturers guidelines	
Guarantee		Lifetime Domestic 20 year Commercial Guarantee	
CE Mark	EN 14041		

*Commercial Tolerance +/- 10%



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE



westex.
DYE SERVICE

Create your own
bespoke colour with
our unique dye service

COMPLEMENT YOUR LVT WITH A WESTEX LUXURY CARPET

Westex use premium wools to manufacture the finest quality carpets that not only look fabulous but endure and keep their good looks for longer.



Standard Colours
a vast core range



2 & 3 Fold Yarns
helps prevent crushing
& pile reversal



Premium Wool
natural, renewable, durable
insulating, soft & beautiful



5 Widths Available
1m, 3.66m, 4m, 4.57m & 5m
All widths an exact colour match



Allergy Guard
protects against dust mites,
bacteria & allergens



Fresh Guard
neutralises pet odours
& inhibits mould



Moth Guard
protects your carpet
against moths



Stain-Resist
keeps carpet looking
newer for longer

To see our extensive ranges and order
samples visit **westexflooring.com**



Westex Carpets Limited.
 Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
 Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
 FLOORING EXCELLENCE