

TECHNICAL DETAILS

westex.

FLOORING EXCELLENCE

PURE LUXURY COLLECTION



westex.
DYE SERVICE

Create your own
bespoke colour with
our unique dye service





westex.
DYE SERVICE

Create your own
bespoke colour with
our unique dye service

PURE LUXURY COLLECTION



The sumptuous Pure Luxury collection is made from 100% premium wool with an exquisite quality and long-lasting good looks.

Available in 5 widths:
1.00m, 3.66m (12ft), 4.00m, 4.57m (15ft) & 5.00m

Method of Manufacture:
2 Fold Tufted Cut Pile

Pile Material:
100% Wool

Standard Colour Palette:
12 Natural Shades - Available in All 3 Qualities

3 LUXURY QUALITIES




OPULENCE

Luxury Rating: **LC5**
End Use Classification: **Class 23 / 33**
Tuft Density*: **164,300 per m²**
Total Carpet Thickness*: **16.5mm**
Tog Rating*: **2.66 tog**



TROIKA

Luxury Rating: **LC5**
End Use Classification: **Class 23 / 33**
Tuft Density*: **164,300 per m²**
Total Carpet Thickness*: **13.5mm**
Tog Rating*: **2.18 tog**

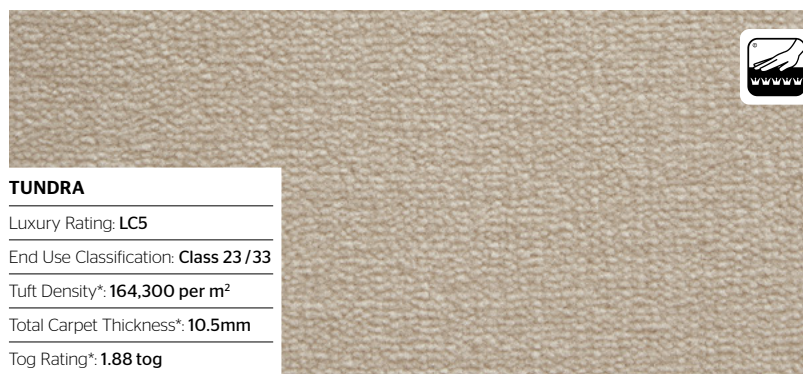

TUNDRA

Luxury Rating: **LC5**
End Use Classification: **Class 23 / 33**
Tuft Density*: **164,300 per m²**
Total Carpet Thickness*: **10.5mm**
Tog Rating*: **1.88 tog**

*+/- 10% commercial tolerance



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE



westex.
DYE SERVICE

Create your own
bespoke colour with
our unique dye service

PURE LUXURY COLLECTION

12 COLOUR OPTIONS



Ermine




Magnolia




Latte




Storm




Ivory



Marshmallow



Mushroom




Platinum




Manor Grey



Maple



Oakland



Onyx



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE

Technical Specification

| | | | |
|---|---|---|--|
| Luxury Rating | BS EN 1307:2014 | LC5 | |
| End Use Classification | BS EN 1307:2014 | Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use | |
| Hexapod 4000 | BS EN 1307:2014 | 4.0 | |
| Hexapod 12000 | BS EN 1307:2014 | 3.0 | |
| Roll Widths* | | Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m | |
| Roll Length | | Customisable | |
| Method of Manufacture | | 2 Fold Tufted Cut Pile, 1/8" Gauge | |
| Tuft Density* | ISO 1763 | 164,300 per m² | |
| Pile Material | | 100% Wool | |
| Pile Height above Backing* | | 14.5mm | |
| Total Carpet Thickness* | | 16.5mm | |
| Primary Backing | | Polypropylene | |
| Flammability | BS4790 Hot Nut Test | Low Radius of Char | |
| Reaction to Fire | BS EN 13501 | Class Bfl-s1 | |
| Delamination | BS ISO 11857 | Pass Minimum 15.00 (N) | |
| Thermal resistance | BS4745 | 2.66 tog | |
| Dimensional Stability | ISO 2551-1981 (2010) | Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5% | |
| Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing | BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12 | 4-5 4 4 | |
| Electrical Resistance | ISO 10965:2011 | Pass Does not exceed 10Ω | |
| Sound Absorption | | Class C with Underlay | |
| Underfloor heating system | | Suitable to a max. 27°C Please check with manufacturers guidelines | |
| Guarantee | | 6 Years | |
| CE Mark | EN 14041 | | |

*Commercial Tolerance +/- 10%

Technical Specification

| | | | |
|---|---|---|--|
| Luxury Rating | BS EN 1307:2014 | LC5 | |
| End Use Classification | BS EN 1307:2014 | Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use | |
| Hexapod 4000 | BS EN 1307:2014 | 4.0 | |
| Hexapod 12000 | BS EN 1307:2014 | 3.5 | |
| Roll Widths* | | Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m | |
| Roll Length | | Customisable | |
| Method of Manufacture | | 2 Fold Tufted Cut Pile, 1/8" Gauge | |
| Tuft Density* | ISO 1763 | 164,300 per m ² | |
| Pile Material | | 100% Wool | |
| Pile Height above Backing* | | 11.5mm | |
| Total Carpet Thickness* | | 13.5mm | |
| Primary Backing | | Polypropylene | |
| Flammability | BS4790 Hot Nut Test | Low Radius of Char | |
| Reaction to Fire | BS EN 13501 | Class Bfl-s1 | |
| Delamination | BS ISO 11857 | Pass Minimum 15.00 (N) | |
| Thermal resistance | BS4745 | 2.18 tog | |
| Dimensional Stability | ISO 2551-1981 (2010) | Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5% | |
| Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing | BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12 | 4-5 4 4 | |
| Electrical Resistance | ISO 10965:2011 | Pass Does not exceed 10Ω | |
| Sound Absorption | | Class C with Underlay | |
| Underfloor heating system | | Suitable to a max. 27°C Please check with manufacturers guidelines | |
| Guarantee | | 6 Years | |
| CE Mark | EN 14041 | | |

*Commercial Tolerance +/- 10%

Technical Specification

| | | | |
|---|---|---|--|
| Luxury Rating | BS EN 1307:2014 | LC5 | |
| End Use Classification | BS EN 1307:2014 | Class 23 Heavy Domestic Use Class 33 Heavy Commercial Use | |
| Hexapod 4000 | BS EN 1307:2014 | 3.5 | |
| Hexapod 12000 | BS EN 1307:2014 | 3.0 | |
| Roll Widths* | | Available in 5 sizes: • 1.00m • 3.66m (12ft) • 4.00m • 4.57m (15ft) • 5.00m | |
| Roll Length | | Customisable | |
| Method of Manufacture | | 2 Fold Tufted Cut Pile, 1/8" Gauge | |
| Tuft Density* | ISO 1763 | 164,300 per m ² | |
| Pile Material | | 100% Wool | |
| Pile Height above Backing* | | 8.5mm | |
| Total Carpet Thickness* | | 10.5mm | |
| Primary Backing | | Polypropylene | |
| Flammability | BS4790 Hot Nut Test | Low Radius of Char | |
| Reaction to Fire | BS EN 13501 | Class Bfl-s1 | |
| Delamination | BS ISO 11857 | Pass Minimum 15.00 (N) | |
| Thermal resistance | BS4745 | 1.88 tog | |
| Dimensional Stability | ISO 2551-1981 (2010) | Pass Pass if shrinkage is equal to or less than 1.2% and extension less than or equal to 0.5% | |
| Colour Fastness: Light Colour Fastness: Shampooing Colour Fastness: Rubbing | BS EN ISO -B02 BS ISO -18168 BS EN ISO -X12 | 4-5 4 4 | |
| Electrical Resistance | ISO 10965:2011 | Pass Does not exceed 10Ω | |
| Sound Absorption | | Class C with Underlay | |
| Underfloor heating system | | Suitable to a max. 27°C Please check with manufacturers guidelines | |
| Guarantee | | 6 Years | |
| CE Mark | EN 14041 | | |

*Commercial Tolerance +/- 10%



westex.
DYE SERVICE

own your colour.

We are very proud of our extensive standard colourbank, which we consider to be second to none. We also offer you limitless bespoke colours, as we have our own Dye House and control the whole manufacturing process. Special Dyes must meet your approval before full production is started.*

THE UNIQUE ADVANTAGES OF A WESTEX CARPET



Allergy Guard

Allergy Guard protects against pests, bacteria and allergens whilst Fresh Guard inhibits mould and neutralises pet odours. All Westex Carpets have an anti-dust mite treatment applied to protect against house dust mites, mould fungi and bacteria and their allergens, fresh guard is also part of the construction of this treatment.

The active ingredient in the treatment does not allow the debris (human skin, hair etc.) to decay into the food that the dust mites thrive upon, thus there is no environment for them to exist or thrive in. This will also inhibit the bacteria and mould development. Thorough vacuuming will then maintain the cleanliness of the carpet.



Fresh Guard

This treatment has been subjected to the full rigours of scientific testing, both toxicologically and ecologically, to establish that there is no harm to human or pet health, or the environment. It is tested to OECD 404 and 406 to qualify as no irritation or sensitisation.

These treatments combine with the wool fibre on a permanent basis and will last the life time of the carpet.



Stain-Resist

All Westex Carpets have a Stain Resist treatment applied. Stain Resist is not a stain blocker. Stain Resist slows the stain penetration down, giving time to get the carpet cleaned. The stain resist formula bonds with the fibre to provide protection against dirt and damp, therefore making caring for the carpet easier.

This treatment prevents stains from penetrating the fiber and they temporarily remain locked on the surface so they can easily be removed. The breathable properties of the fibre are not affected.

Shampooing and professional carpet cleaning products cannot break the bonds between the active chemical and fibre. The performance of the Stain Resist will last 5 years, subject to normal, reasonable use.

Stain Resist is free from CFCs and is dermatologically tested. The Stain Resist polymers show no toxicity even at the highest applied levels and no bioavailability, metabolism or hydrolysis.



Moth Guard

All Westex carpets have a mothproofing treatment applied. Mothproofing protects your carpet against the attack of both moths and other wool eating insects. The active ingredient in the moth-proof makes the keratin (a protein found in wool) that moths, bugs and other insects thrive upon, indigestible. They literally starve as their digestive systems are unable to convert the keratin they have eaten into usable food.

The moth-proof combines with the wool fibre on a permanent basis and will last the life time of the carpet. Westex's award winning moth-proof process has had scientific testing, both toxicologically and ecologically, to establish that there is no harm to human or pet health with no effluent waste.



*A minimum order quantity of 40m² in any one width applies.



Westex Carpets Limited.
Calder Bank Mills, Calder Bank Road, Dewsbury WF12 9QW, United Kingdom
Tel: +44 (0)1274 861334 Fax: +44 (0)1274 873266
westexflooring.com info@westexflooring.com

westex.
FLOORING EXCELLENCE